


Bundle DuraPack 32/27 + 3x12/10 mm

Bundle of microducts DuraPack is intended for protection of optical microcables. Microducts DuraMicro DI are preinstalled in duct from high density polyethylene (HDPE). The duct has smooth inner and outer surface.



Installation methods and conditions are described in the Installation manual.

The quality management system of Dura-Line CT is certified acc. to EN ISO 9001. Bundle does not contain dangerous chemicals in accordance to the Directive 2006/1907/EC (REACH). Bundle meets requirements of the Directive 2002/95/EC (RoHS) - content of lead, cadmium, mercury, Cr^{VI}, PBB and PBDE.


Parameters of microducts are in relevant Technical Data Sheet and in company standard CWS103-02.

Parameter	Value
Mean outer diameter of the duct (OD)	32+0,3 mm
Wall thickness of the duct (WT)	min. 2,5 mm
Crush resistance	min. 1 400 kPa (at ID deform. by 15%)
Weight	*322 kg/km
Transport and storage temperatures	from -40°C to +70°C
Installation temperatures	from -10°C to +50°C
Operating temperatures	from -40°C to +70°C
Installation tensile force	max. 4 000 N
Minimum bending radius	320 mm
Outdoor exposure limit in Central Europe	max. 12 months

* informative value

- **Standard** is a basic material version convenient for most applications.
- **UV stabilized** is more resistant to ultraviolet radiation. Storability is prolonged to 24 months at Central Europe outdoor conditions. Only duct is stabilized.
- **Antistat** - lower electrical surface resistance. Only microducts are antistatic.

Duct and microducts are supplied in natural translucent version or in a wide scale of the following RAL list.

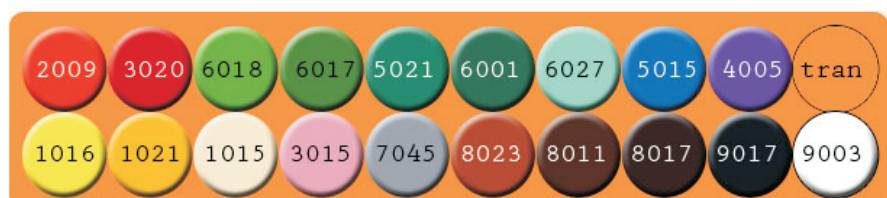

DESCRIPTION, APPLICATION

LEGISLATION

PARAMETERS

MODIFICATION

COLOR LIST

Bundle DuraPack 32/27 + 3x12/10 mm

MARKING

Bundle is printed in whole length according to customer requirement. Printing color is contrasting to bundle color. Printing can be doubled in opposite sides as an option. Printing scheme is repeating after 1 metre.

Example of printing scheme:

DURA-LINE CT DuraPack 32/27+3x12/10 mm SILICORE 03/2009 LOTNo 12345678 0000 m ><

PACKING AND STORAGE

Bundle is wound on return wooden drum and coil is wrapped by stretch film. Bundle's ends are protected by plastic caps protecting them from impurities penetrating into duct and microducts.

DB1 core diameter is 650 mm.

All drum dimensions are informative values.

Other types and dimensions of drum are on request.

Drum	Flange diameter (mm)	Drum width (mm)	Shaft hole diameter (mm)	Winding maximum length (m)	Informative weight of full drum (kg)
DTX	2 300	1 140	105	3x 1 000	1 400

